




Rock 40
RIGID ACOUSTIC CLICK LVT 

Urban 40
DRYBACK LVT 


inspiring your projects cost-effective solutions

Rock 40

RIGID ACOUSTIC CLICK LVT 

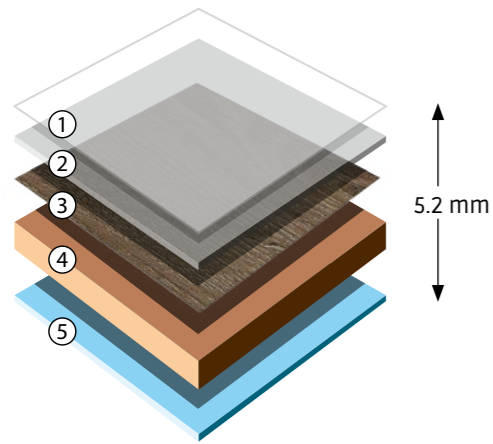


UNICLIC  **UNIPUSH**
PATENTED TECHNOLOGY 



↓ Flat Click





- ① Polyurethane treatment PUR | **Easy maintenance**
- ② Wear layer 0.40 mm - Class 23/32 | **Domestic/Soft commercial**
- ③ Design | **Realistic Design & Super Matt Finish**
- ④ Stable layer with Unipush technology | **Rigid Core**
- ⑤ 20dB acoustic underlay | **Built-in Underlay**

 **Easy Maintenance**
PU surface treatment for ease of maintenance and high scratch resistance

 **Micro Bevel**
4 way micro bevel adds to the realistic look of the tiles

 **Super Matt Finish**
Reduces shine on the floor to enhance its realistic, natural depth of colour

 **Easy to Install**
Stabilising rigid core with Uniclic/Unipush patented technology

 **Acoustic Underlay**
Built in acoustic underlay backing reducing noise levels by 20 dB

 **Waterproof**
100% waterproof making it an ideal choice for bathrooms and kitchens

Recyclable PVC




Phtalate-free PVC
(except recycled PVC)

ALABAMA | Herringbone size: 126 x 630 mm |

Urban 40

DRYBACK LVT 

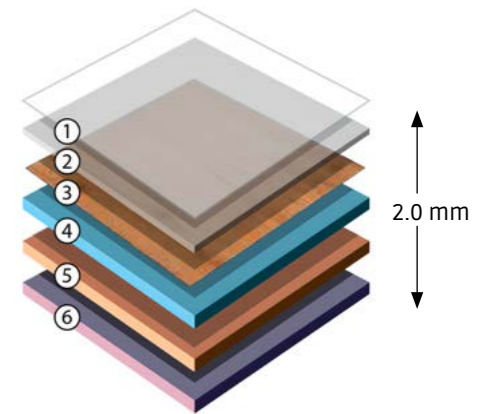


① Polyurethane treatment PUR | **Easy maintenance**

② Wear layer 0.40 mm - Class 22/32 | **Domestic**

③ Design | **Realistic Design & colours**

④⑤⑥ Calendered PVC | **Resistant to indentation**

 **Easy Maintenance**
PU surface treatment for ease of maintenance and high scratch resistance

 **Micro Bevel**
4 way micro bevel adds to the realistic look of the tiles

 **Super Matt Finish**
Reduces shine on the floor to enhance its realistic, natural depth of colour

 **Easy to Install**

Cut with a blade
Waterproof
100% waterproof making it an ideal choice for bathrooms and kitchens

Recyclable PVC



Phtalate-free PVC
(except recycled PVC)


Available in Rock 40




ALABAMA | Herringbone size: 126 x 630 mm | Available in Rock 40



PHILADELPHIA | Herringbone size: 126 x 630 mm | Available in Rock 40

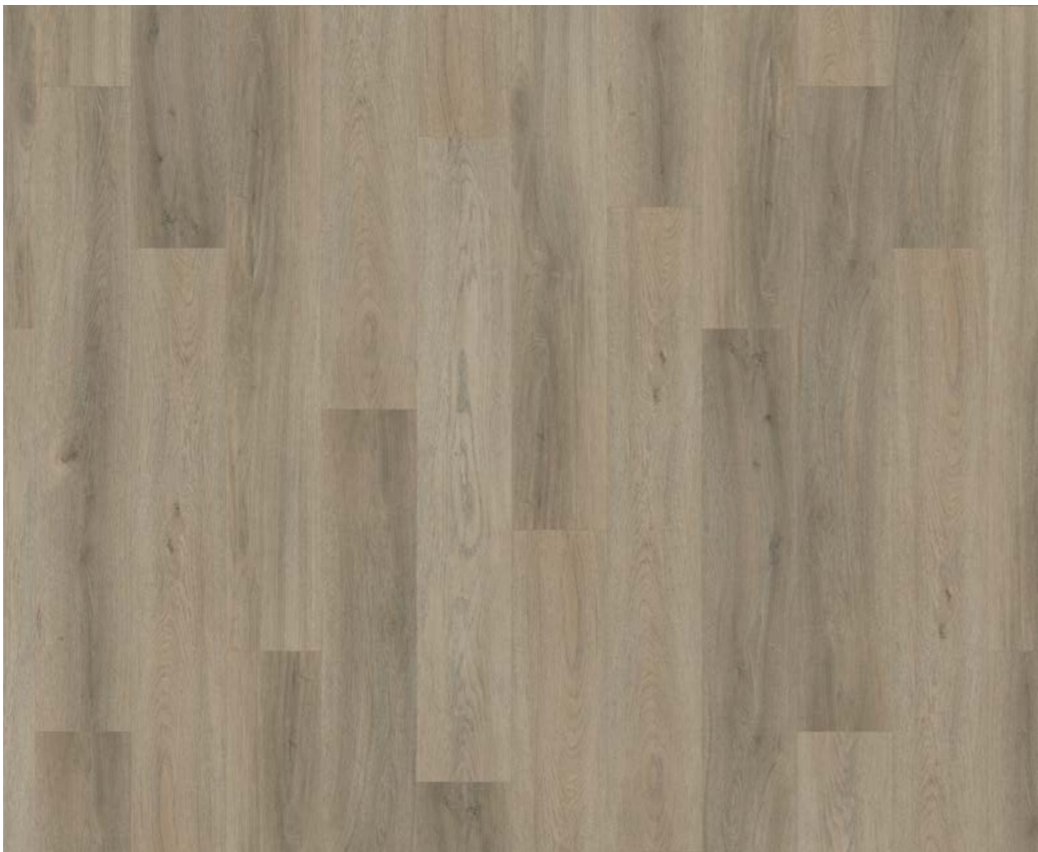


ALABAMA | Plank size: 180 x 1220 mm | available in Rock 40



Rock 40
RIGID CLICK LVT
ACOUSTIC 20 dB

10 YEARS WARRANTY DOMESTIC USE
5 YEARS WARRANTY COMMERCIAL USE

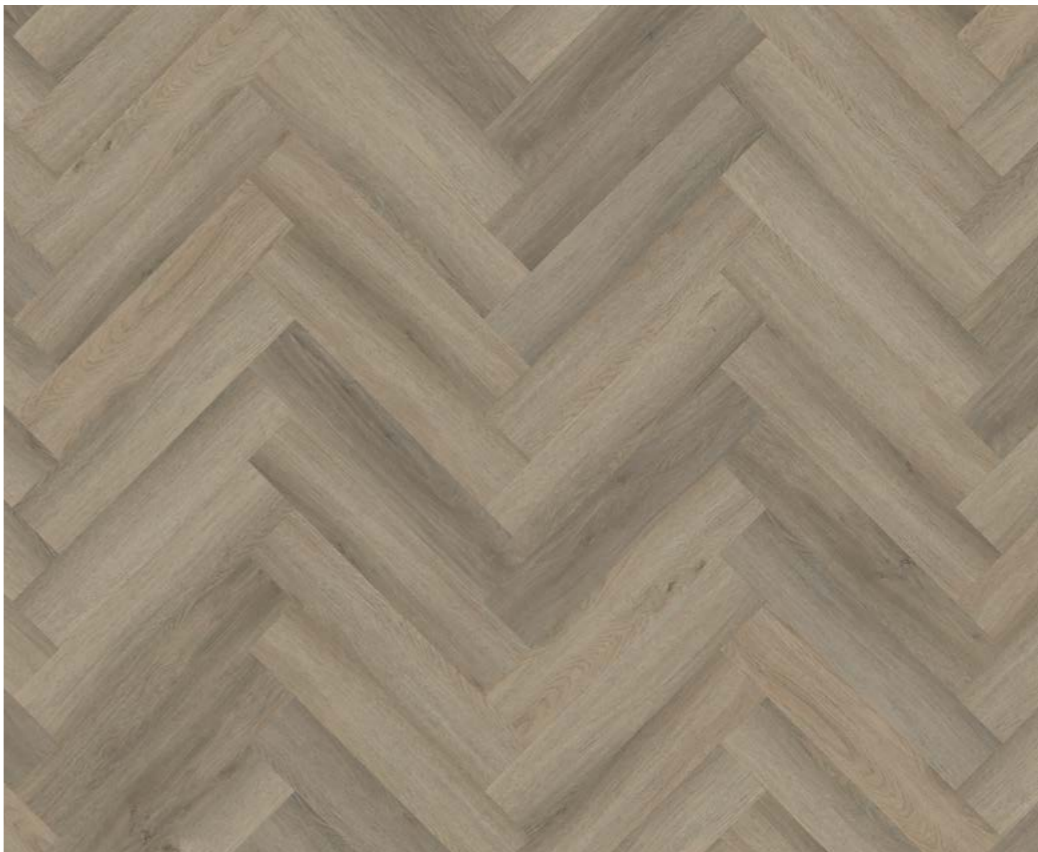

ALABAMA | Herringbone size: 126 x 630 mm | available in Rock 40

10 YEARS WARRANTY DOMESTIC USE
5 YEARS WARRANTY COMMERCIAL USE
UNICLIC UNIPUSH ACUSTIC 20 dB

available in:
Rock 40
RIGID ACOUSTIC CLICK LVT

10 YEARS WARRANTY DOMESTIC USE
5 YEARS WARRANTY COMMERCIAL USE
5G ACUSTIC 20 dB

available in:
Rock 40
RIGID ACOUSTIC CLICK LVT



Rock 40 Urban 40

RIGID ACOUSTIC CLICK LVT 

DRYBACK LVT 

WOOD, HERRINGBONE & TILE COLLECTION

inspire your projects | cost effective solutions




UltraMatt Technology

New Generation

The planks, tiles and herringbone in **Rock 40** and **Urban 40** now benefit with a new generation of **UGF finish**. This UltraMatt technology enhances your floorcovering :



- 1 Protection** against daily wear and tear without affecting the look of your floor.
- 2 Surface Textures** that create a natural feel to your floor.
- 3 A Low Shine Finish** which ensures your floor remains incredibly realistic even in bright conditions.




Anti scratch
Anti stain




Gloss usually between: 5 & 6  **UGF**  **Matt Rock 40 and Urban 40 : between 1.5 & 2**

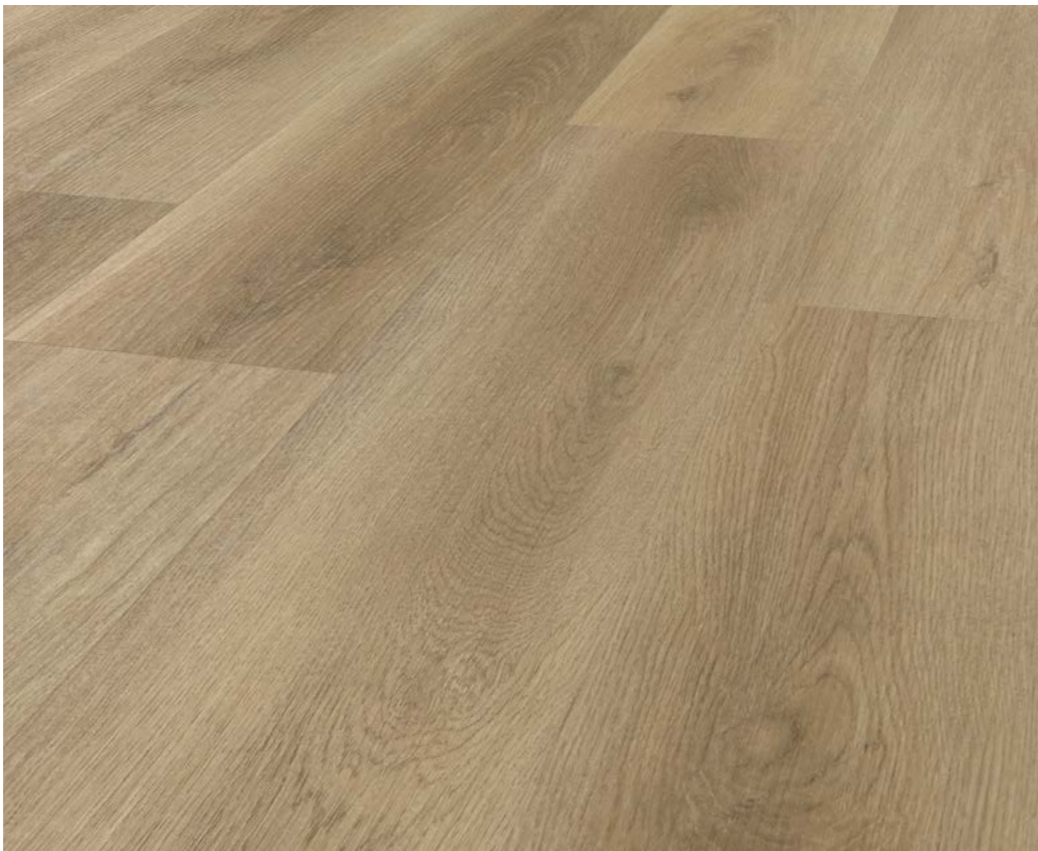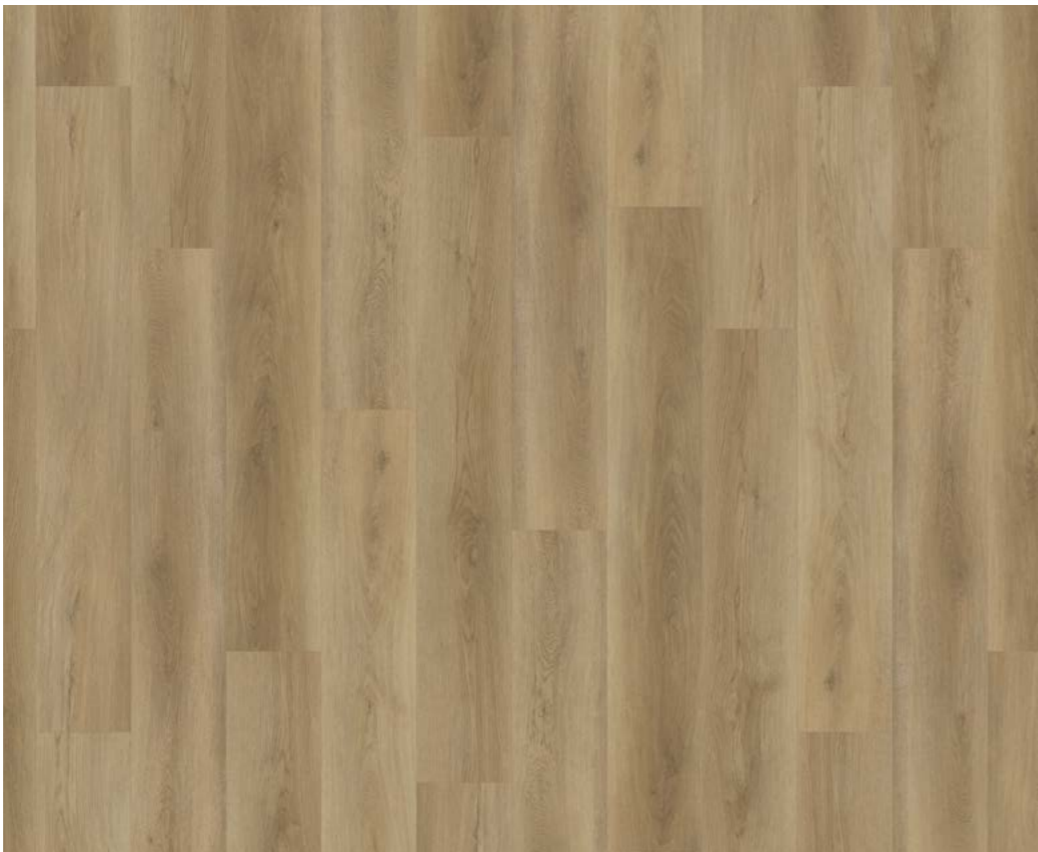

PHILADELPHIA | Plank | Available in Rock 40 & Urban 40

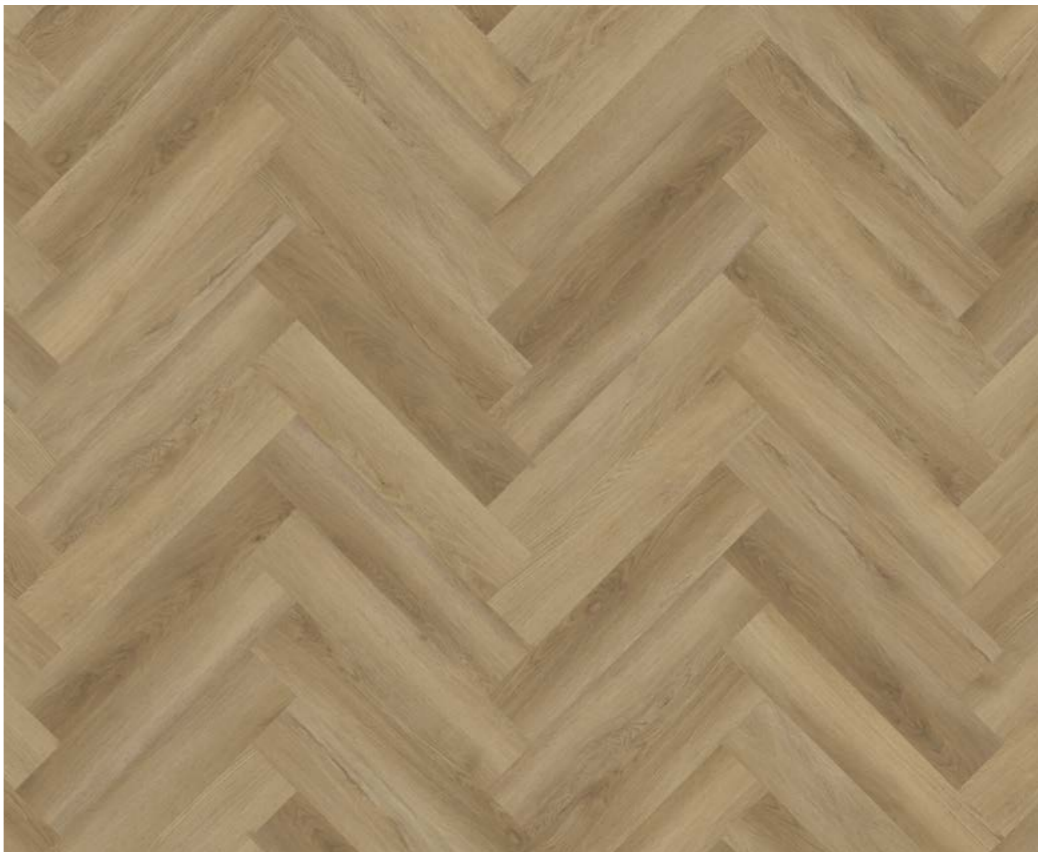

PHILADELPHIA | Herringbone size: 126 x 630 mm | available in Rock 40

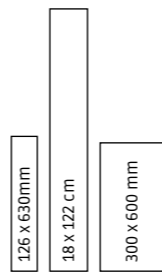

Rock 40

RIGID CLICK LVT




available in: **Rock 40**
RIGID ACOUSTIC CLICK LVT

available in: **Urban 40**
DRYBACK LVT



available in: **Rock 40**
RIGID ACOUSTIC CLICK LVT

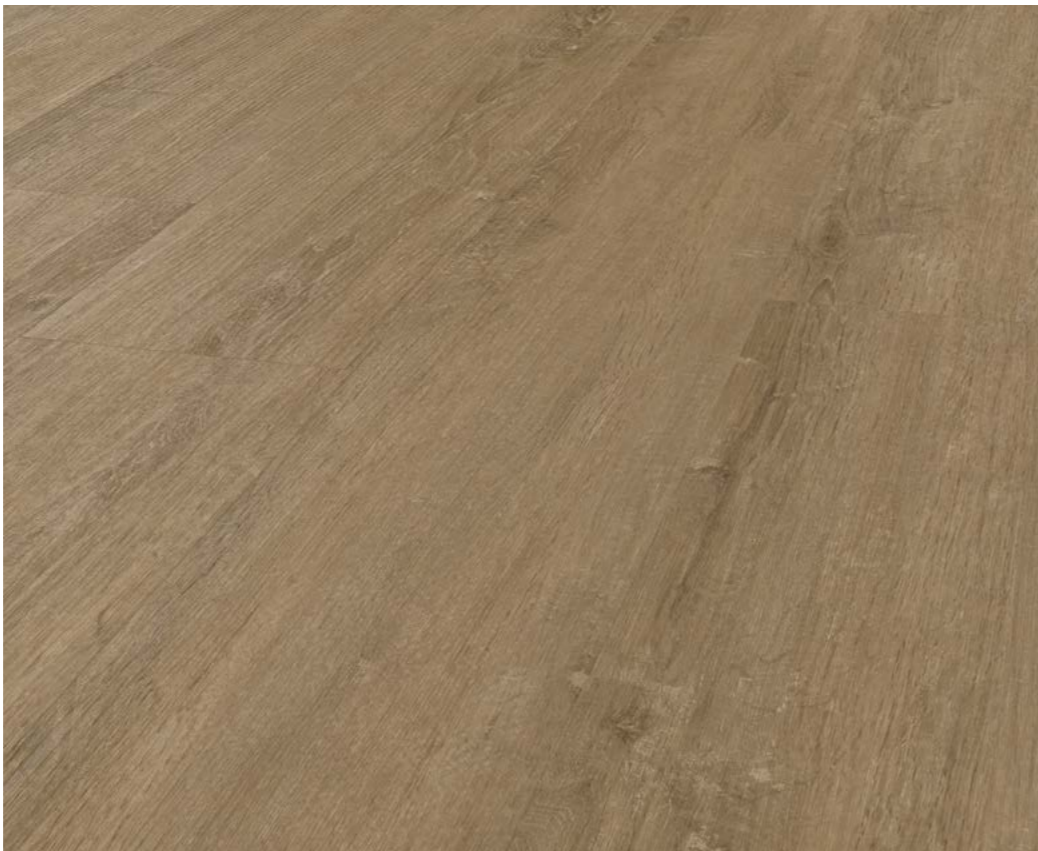

COLORADO | Plank size: 180 x 1220 mm | available in Rock 40




available in:

Rock 40

RIGID ACOUSTIC CLICK LVT

COLORADO | Plank size: 180 x 1220 mm | Available in Rock 40

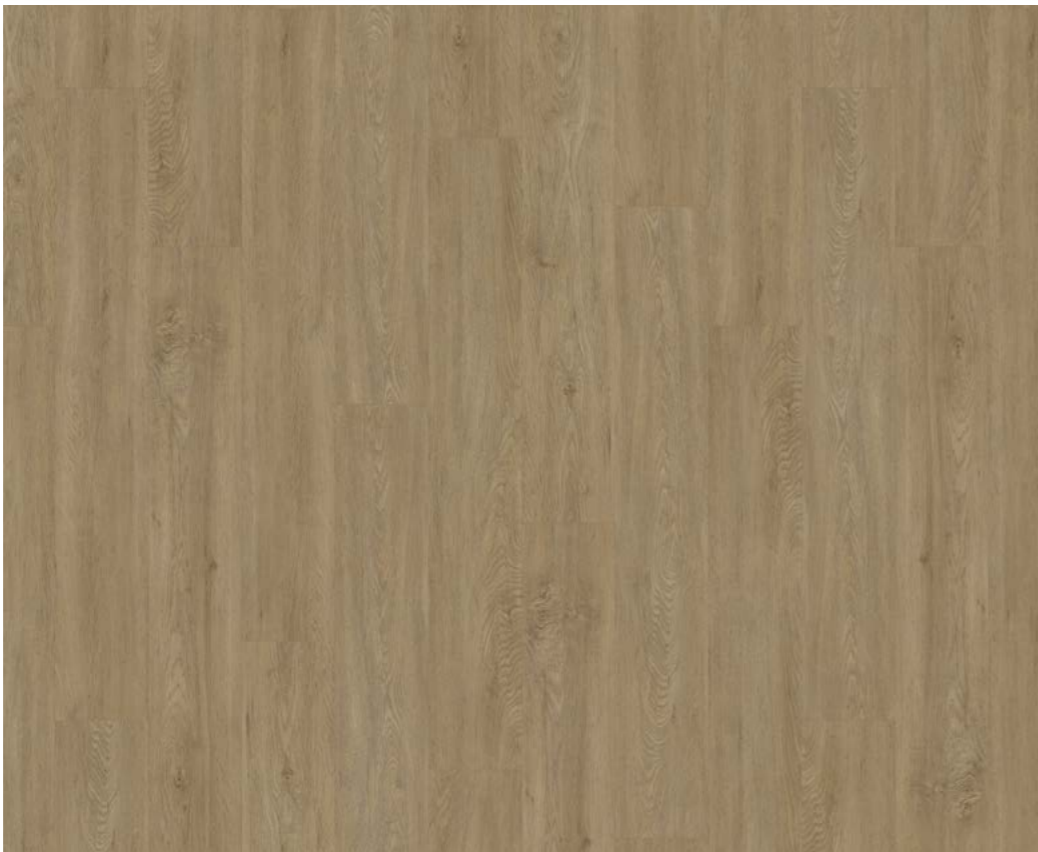

BOSTON | Plank size: 180 x 1220 mm | available in Rock 40




available in:

Rock 40

RIGID ACOUSTIC CLICK LVT

BOSTON | Plank size: 180 x 1220 mm | Available in Rock 40

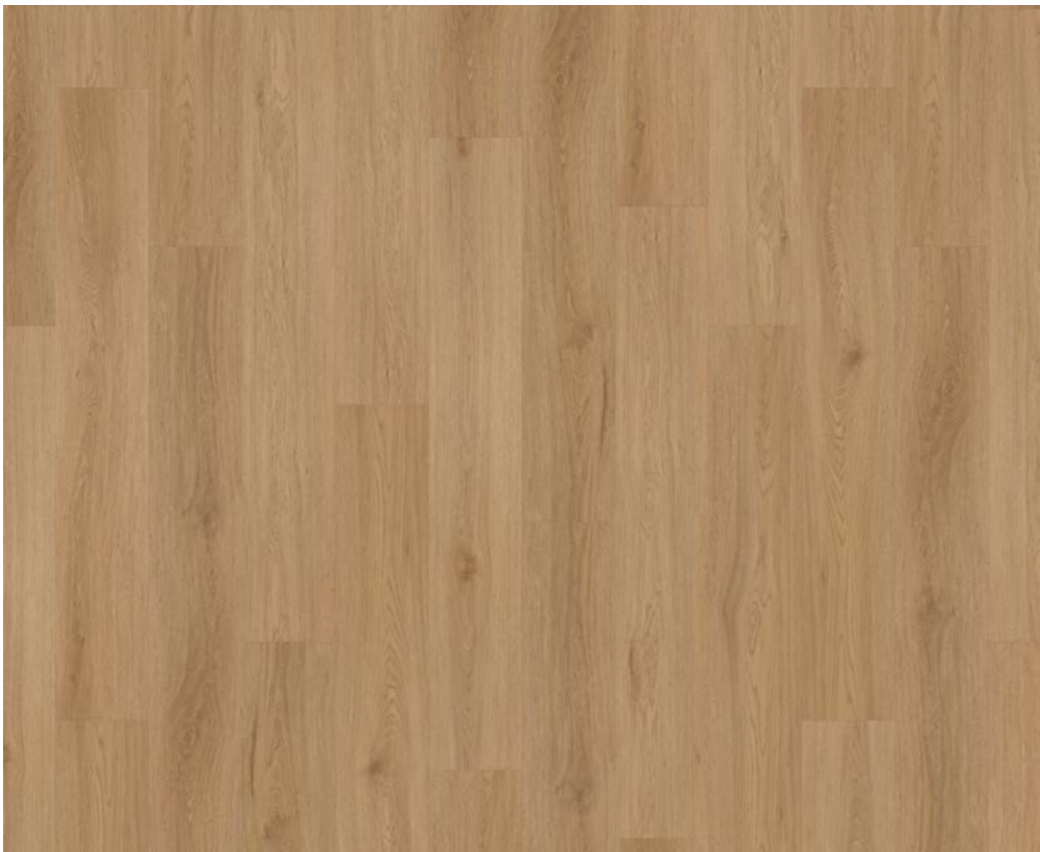

CALIFORNIA | Plank size: 180 x 1220 mm | available in Rock 40





available in:

Rock 40

RIGID ACOUSTIC CLICK LVT



CALIFORNIA | Plank size: 180 x 1220 mm | Available in Rock 40

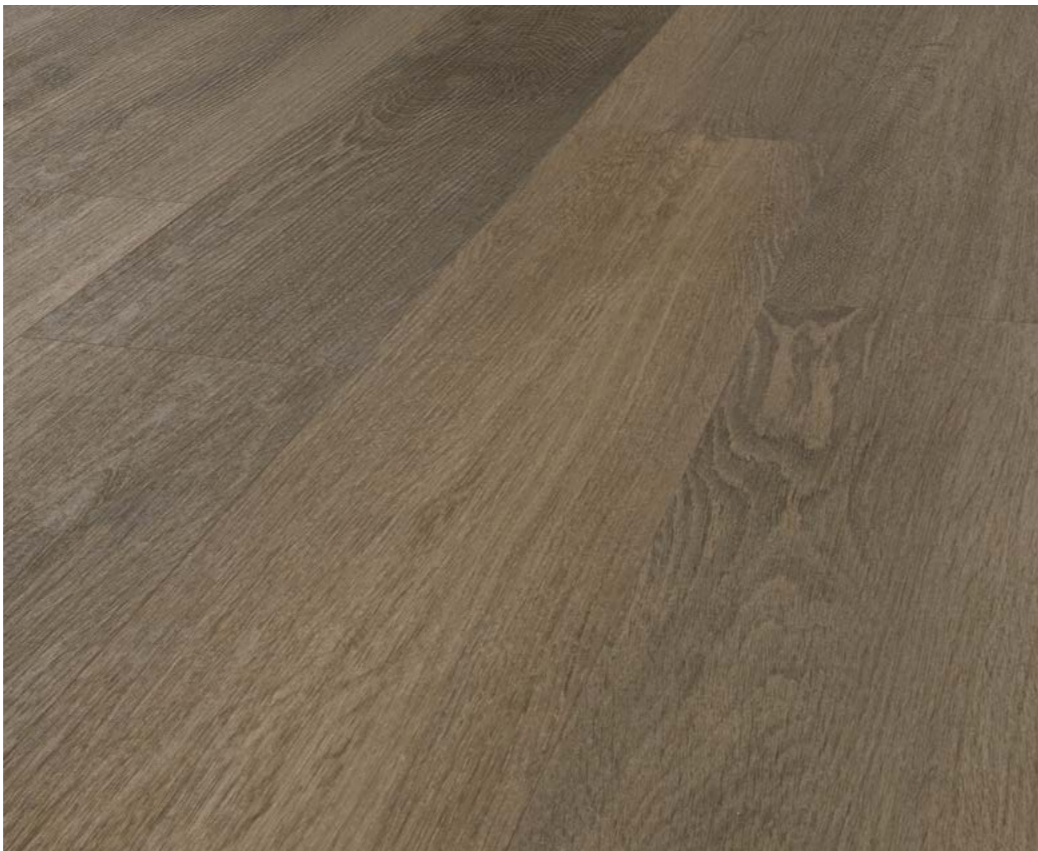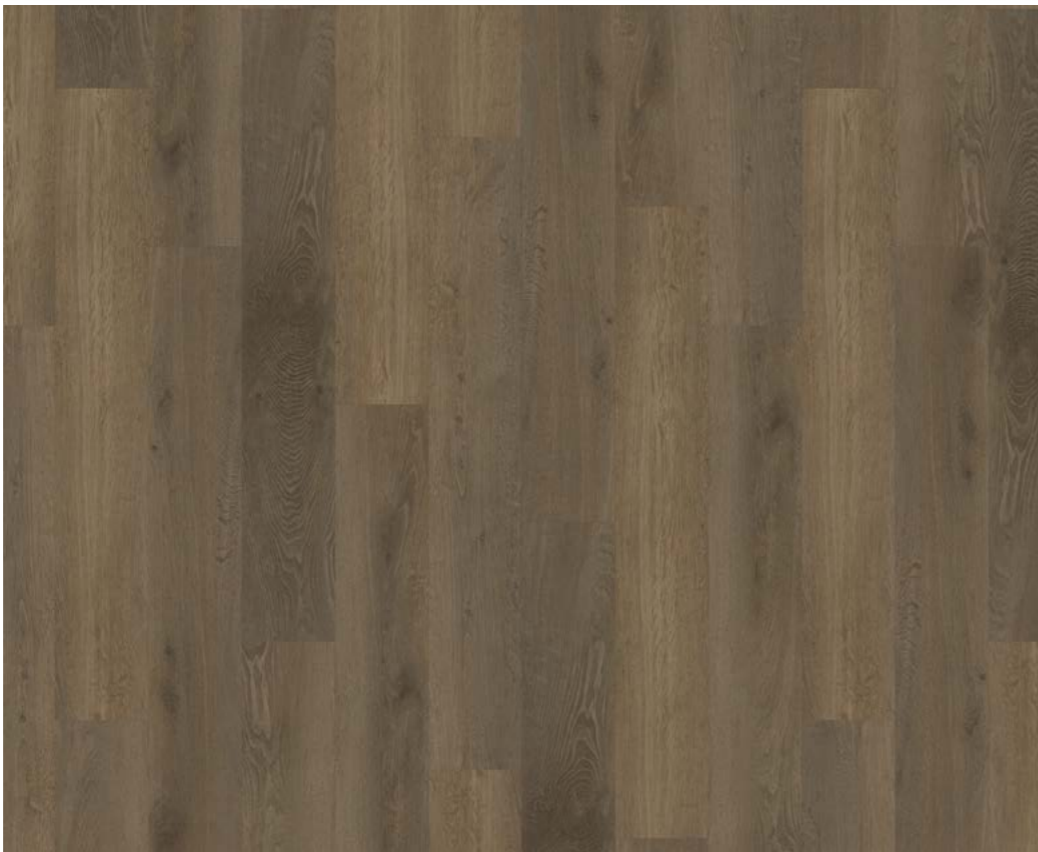

SAN DIEGO | Plank size: 180 x 1220 mm | available in Rock 40

10 YEARS WARRANTY DOMESTIC USE

5 YEARS WARRANTY COMMERCIAL USE


UNICLIC UNIPUSH ACQUASILE

ACOUSTIC 20 dB

available in:
Rock 40
RIGID ACOUSTIC CLICK LVT



SAN DIEGO | Plank size: 180 x 1220 mm | Available in Rock 40

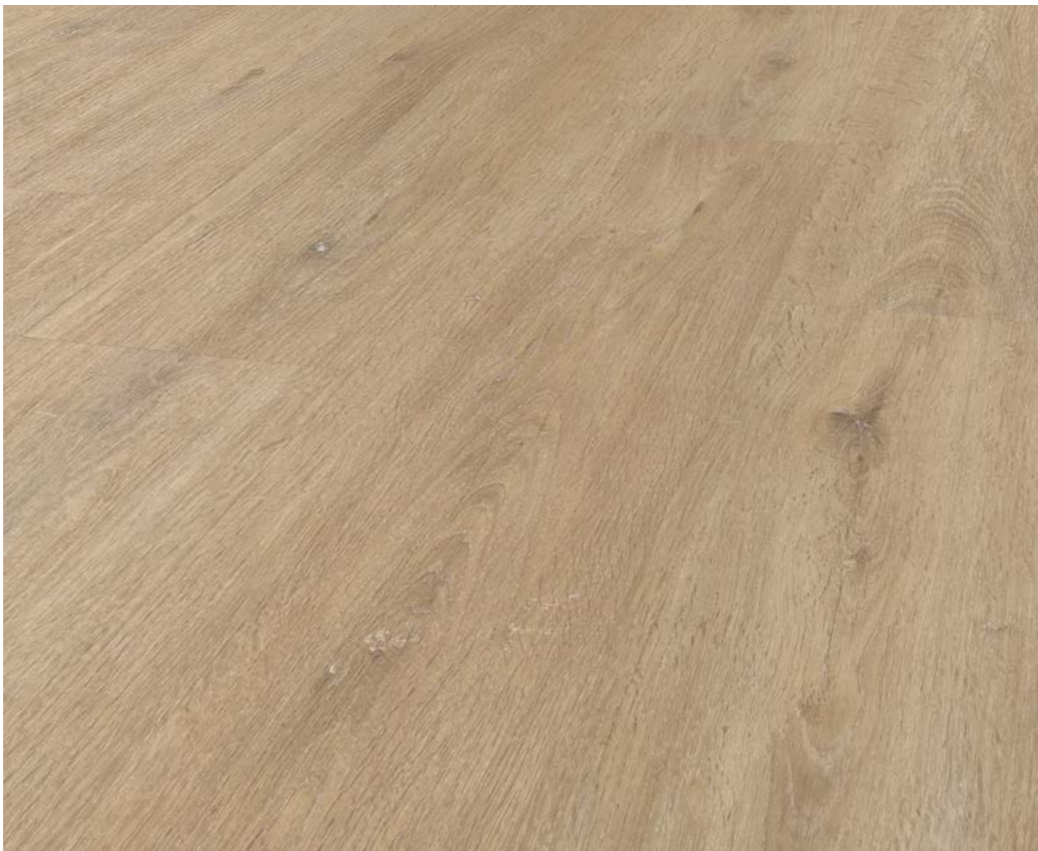

MIAMI | Plank | Available in Rock 40 & Urban 40







available in:
Rock 40
 RIGID ACOUSTIC CLICK LVT

available in:
Urban 40
 DRYBACK LVT



MIAMI | Plank | Available in Rock 40 & Urban 40



MICHIGAN | Plank | Available in Rock 40 & Urban 40

10
YEARS
WARRANTY
DOMESTIC
USE

5
YEARS
WARRANTY
COMMERCIAL
USE

UNICLIC
UNIPUSH
ACQUATIC
20 dB

available in:
Rock 40
RIGID ACOUSTIC CLICK LVT

available in:
Urban 40
DRYBACK LVT



MICHIGAN | Plank | Available in Rock 40 & Urban 40



LOUISIANA| Plank | Available in Rock 40 & Urban 40








available in:
Rock 40
 RIGID ACOUSTIC CLICK LVT

available in:
Urban 40
 DRYBACK LVT



LOUISIANA | Plank | Available in Rock 40 & Urban 40

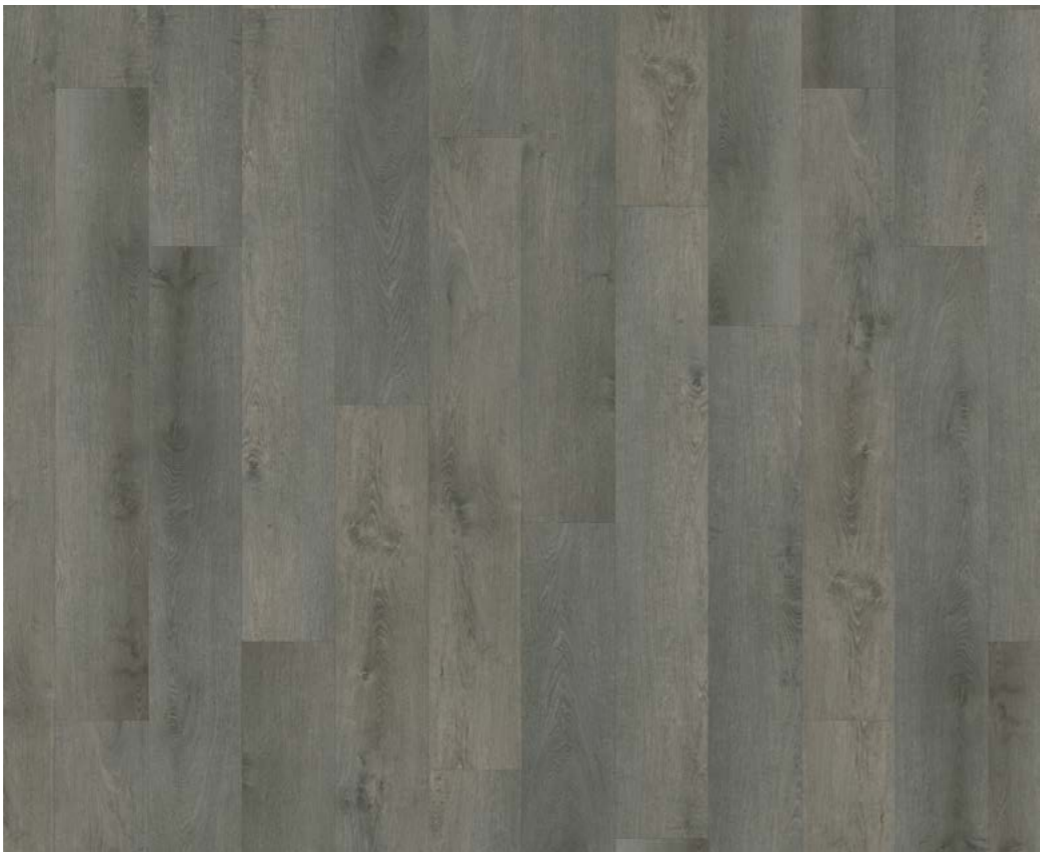

NEW ORLEANS | Plank size: 180 x 1220 mm | available in Rock 40



available in:
Rock 40
RIGID ACOUSTIC CLICK LVT



NEW ORLEANS | Plank size: 180 x 1220 mm | Available in Rock 40



ATLANTA | Plank size: 180 x 1220 mm | available in Rock 40



10 YEARS WARRANTY DOMESTIC USE


5 YEARS WARRANTY COMMERCIAL USE

UNICLIC UNIPUSH ACQUADORS TECHNOLOGY 2

ACOUSTIC 20 dB

available in:
Rock 40
RIGID ACOUSTIC CLICK LVT

ATLANTA | Plank size: 180 x 1220 mm | Available in Rock 40 & Urban 40

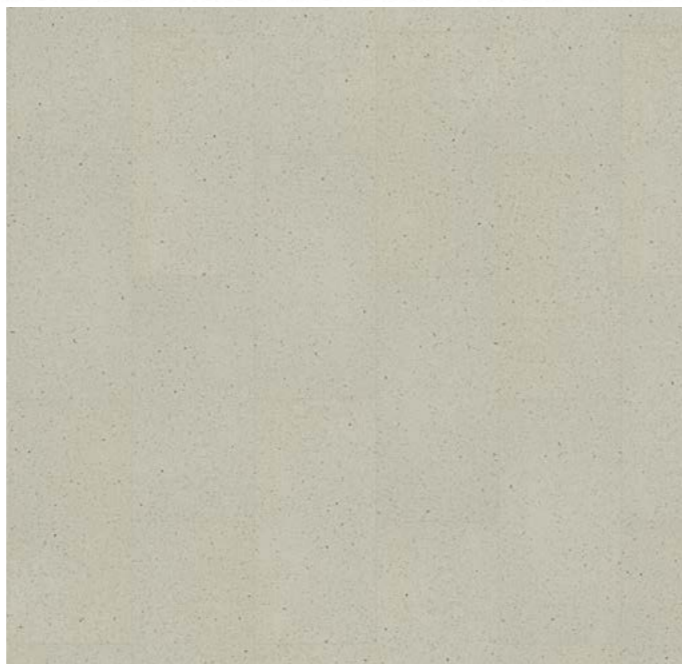

SAN FRANCISCO | Tile size: 300 x 600 mm | available in Rock 40



SAN FRANCISCO | Tile size: 300 x 600 mm | Available in Rock 40



available in:
Rock 40
RIGID ACOUSTIC CLICK LVT





MEMPHIS | Tile size: 300 x 600 mm | available in Rock 40



MEMPHIS | Tile size: 300 x 600 mm | Available in Rock 40



available in:
Rock 40
RIGID ACOUSTIC CLICK LVT

	STANDARDS	UNITS	RIGID ACOUSTIC CLICK LVT	DRYBACK LVT
CHARACTERISTICS				
			Rock 40 	Urban 40 
Gauge	EN ISO 24346	mm	5.20	2.00
Wear Layer	EN ISO 24340	mm	0.40	0.40
Dimensions (plank)	EN ISO 24342	mm	10 planks - 180mm x 1220mm = 2.19m ²	16 planks - 187mm x 1227mm = 3.67m ²
Dimensions (tile)	EN ISO 24342	mm	10 planks - 300mm x 600mm = 1.80m ²	N/A
Dimensions (herringbone)	EN ISO 24342	mm	28 planks - 126mm x 630mm = 2.23m ²	N/A
Joint Profile (plank)		-	Uniclic Unipush	Dryback
Joint Profile (tile)		-	Uniclic Unipush	N/A
Joint Profile (herringbone)		-	5Gi Push Down- Valinge	N/A
Surface Treatment		-	Polyurethane PU	Polyurethane PU
Total Weight	EN ISO 22997	g/m ²	8,420	3,900
PERFORMANCE				
General Performance	EN ISO 10582	-	Hetrogeneous	Hetrogeneous
Performance Classification	EN ISO 10874	-	23 to 32	23 to 32
Slip Resistance	DIN 51130	-	Group R10	Group R10
Slip Resistance (coef.)	EN 13893	-	Rank DS (≥ 0,30°)	Rank DS (≥ 0,30°)
Impact Sound Reduction	EN ISO 717-2	dB	20	5
Dimension Stability	EN ISO 23999	%	≤0.15	≤0.25
Residual Indentation	EN ISO 24343-1	mm	≤ 0.20	≤ 0.20
Colour Fastness to Artificial Light	EN ISO 105-B02	-	> 6 degress	> 6 degress
Behaviour to Fire	EN 13501-1	-	Rank Bfl-s1	Rank Bfl-s1
Castor Chair Suitability	ISO 4918	-	25,000 cycles (without damage)	25,000 cycles (without damage)
Underfloor Heating	EN 12524	-	Suitable (≤0.27o C)	Suitable (≤0.27o C)
Electrical Behaviour	EN 1815	kV	< 0.2 antistatic)	< 0.2 antistatic)
Chemical Resistance	ISO 26987	-	Good	Good
Thermal Conductivity	EN ISO 10456	W/m.k	0.151	0.151
ENVIRONMENT				
VOC Emissions	EN 16516	kV	<100 /A+	<100 /A+
Formaldehyde	EN 717-1	-	E1 - Not detected	E1 - Not detected
European rules / REACH	1907/2006/CE	µg/m ³	Compliant	Compliant
DESCRIPTION				
Guarantee			10 years for heavy domestic use, 5 years for soft commercial use	
IMPLEMENTATION - MAINTENANCE TIP				
www.liberty-floor.com				

